

ELEGANCE



WOLF


Ivory Lappato Rett. 45x90 (17^{11/16}"x35^{7/16}"



Naturale



Lappato

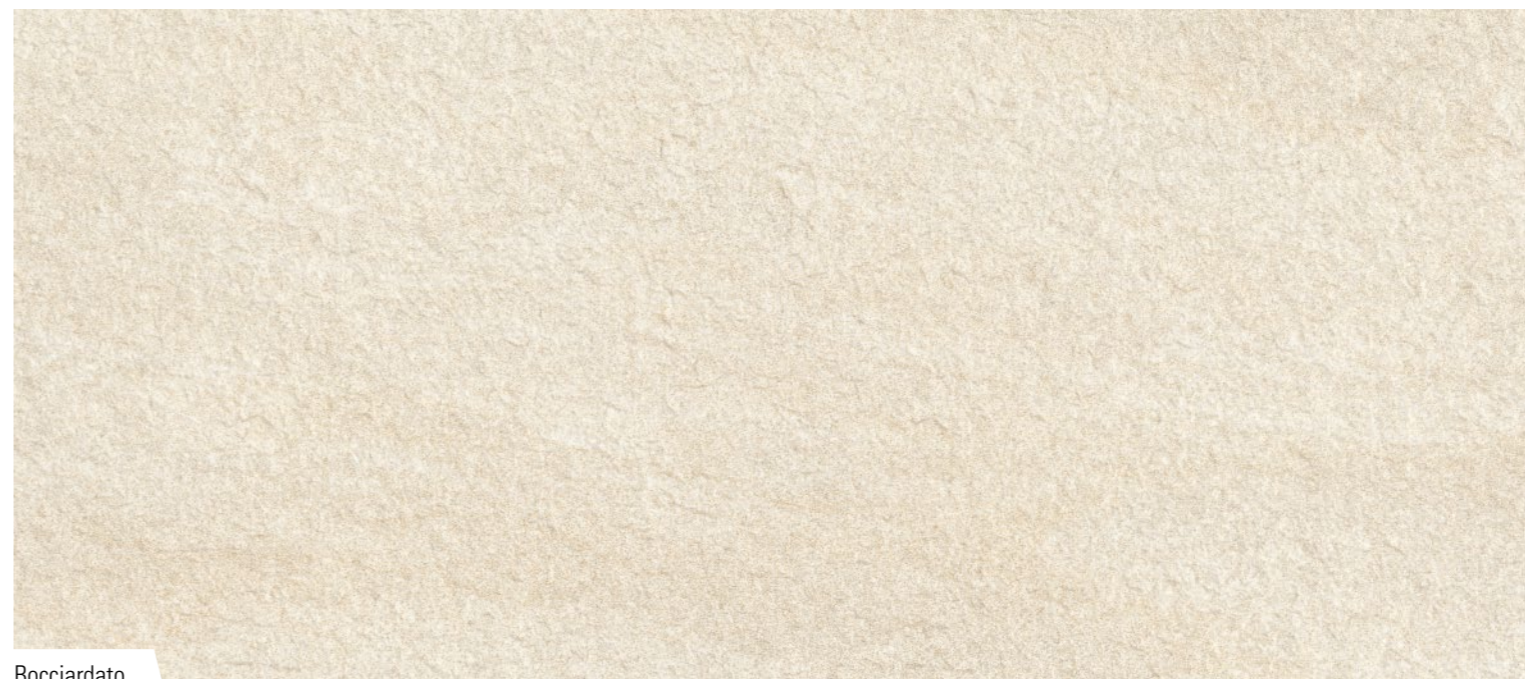

Bocciardato





Lappato



Naturale



Naturale



Beige Naturale Rett. 30x60 (11¹³/₁₆" x 23⁵/₈")



Brown Naturale Rett. 30x60 (11¹³/₁₆" x 23⁵/₈")



GREY

ANTRACITE

Naturale

Naturale



Grey Naturale Rett. 30x60 (11¹³/₁₆"x23⁵/₈")

Antracite Naturale Rett. 30x60 (11¹³/₁₆"x23⁵/₈")



COLORI E FORMATI

Colours and Sizes | Couleurs et Formats | Farben und Formate | Colores y Tamaños | Цвета и Форматы

Ivory



Beige



Brown



Grey



Antracite



Si consiglia la posa con fuga 2 mm. - Laying with a 2 mm-joint is recommended. - Pose recommandée avec joints de 2 mm.
Es wird eine Fugenbreite von 2 mm empfohlen. - Se recomienda la colocación con juntas de 2 mm. - Рекомендуется укладка с швом 2 мм.

Verificare l'abbinamento dei toni tra i formati differenti. - Check the colour matching between different sizes.
Vérifier l'assortiment des tonalités entre les différents formats. - Die Kombination der Farbtöne unter den verschiedenen Formaten prüfen.
Comprobar la combinación de los tonos entre los distintos formatos. - Проверьте сочетание тонов у разных форматов.

COLORI E FORMATI

Colours and Sizes | Couleurs et Formats | Farben und Formate | Colores y Tamaños | Цвета и Форматы

9,5 mm.



Naturale Rett.
45x90 - 17^{11/16}"x35^{7/16}"
E10N Ivory ● T23
E10P Beige ● T23

Lappato Rett.
45x90 - 17^{11/16}"x35^{7/16}"
E11G Ivory ● T35
E11H Beige ● T35



Naturale Rett.
30x60 - 11^{13/16}"x23^{5/8}"
E12E Ivory ● T14
E12G Beige ● T14
E12J Brown ● T14
E12L Grey ● T14
E12N Antracite ● T14

Lappato Rett.
30x60 - 11^{13/16}"x23^{5/8}"
E12D Ivory ● T23


Bocciardato Rett.
30x60 - 11^{13/16}"x23^{5/8}"
E12P Ivory ● T14

DECORI

Decors | Decors | Dekore | Decorados | Декоры

MOSAICO SQUARE MIX NAT./LAP./BOCC.*

Tessera - Chip 2,3x2,3 - 7/8" x 7/8"



30x30 - 11^{13/16}"x11^{13/16}"
E14T Ivory ● A96

MOSAICO EXAGON MIX NAT./LAP./BOCC.*



30x30 - 11^{13/16}"x11^{13/16}"
E14N Ivory ● A34
Pcs. Box 5

* Su rete in fibra - On fibre mesh backing - Sur filet en fibre de verre - Auf Glasfasernetz - Sobre malla de fibra - На волоконной сетке


PEZZI SPECIALI

Trims | Pieces Speciales | Formteile | Piezas Especiales | Специальные Изделия

	Dimensione Size	Ivory	Beige	Brown	Grey	Antracite	Fascia di prezzo Price band
 Battiscopa - Skirting	Nat. Rett. 8,5x60 - 3 ^{3/8} "x23 ^{5/8} " Pcs. Box 15 - LM x Box 9	E150	E151	E7XW	E152	E153	● A11
 Gradino - Stair Tread	Nat. Rett. 30x30 - 11 ^{13/16} "x11 ^{13/16} " Pcs. Box 12 - LM x Box 3,60	E7XT	E14Y	E7XU	E7XV	E14Z	● A20
 Cove Base*	Nat. 16x30 - 6 ^{5/16} "x11 ^{13/16} " Pcs. Box 30	E1CE	E1CF	E1CG	E7YT	E1CH	● A22
 Cove Base Ang. Int.* Cove Base In Corner	Nat. 2,5x16 - 15/16"x6 ^{5/16} " Pcs. Box 10	E1C8	E1C9	E1CA	E1CC	E1CD	● A16
 Cove Base Ang. Est.* Cove Base Out Corner	Nat. 2,5x16 - 15/16"x6 ^{5/16} " Pcs. Box 10	E1C3	E1C4	E1C5	E1C6	E1C7	● A16

* Ordine minimo 500 pezzi - Minimum order: 500 pieces - Commande minimale 500 pièces
Mindestbestellmenge 500 Stücke - Pedido mínimo 500 piezas - Минимальный заказ - 500 штук



CARATTERISTICHE TECNICHE Technical Features - Caracteristiques Techniques - Technische Eigenschaften Technische Eigenschaften - Caracteristicas Tecnicas - Технические Характеристики	NORMA Standard - Norme Norm - Norma - Norma	VALORI Value - Valeur Vorgabe - Valor - Средние
 ASSORBIMENTO D'ACQUA (VALORE MEDIO IN %) Water absorption (Average value expressed in %) - Absorption d'eau (Valeur moyenne en %) Wasseraufnahme (Durchschnittswert in %) - Absorción de agua (Valor medio en %) Поглощение воды	UNI EN ISO 10545/3 ASTM C373	CONFORME COMPLIANT
 RESISTENZA ALLA FLESSIONE Modulus of rupture - Resistance a la flexion - Biegefestigkeit Resistencia a la flexion - Прочность на изгиб	SPESSORE UNI EN ISO 10545/4	9,5 mm ≥ 45 N/mm ²
FORZA DI ROTTURA Breaking strength - Résistance à la rupture - Bruchlast Resistencia a la rotura - Разрывное усилие	UNI EN ISO 10545/4 ASTM C648	≥ 2000 N 400 Lbs
 RESISTENZA AL GELO Frost resistance - Résistance au gel - Frostbeständigkeit Resistencia a las heladas - Морозостойкость	UNI EN ISO 10545/12 ASTM C1026	CONFORME UNAFFECTED
 RESISTENZA CHIMICA AD ALTE E BASSE CONCENTRAZIONI DI ACIDI E BASI Chemical resistance to high and low acid and basic concentrations Résistance chimique aux hautes et basses concentrations d'acides et de bases Chemikalienfestigkeit bei hohen und niedrigen Konzentrationen von Säuren und Basen Resistencia química con concentraciones altas y bajas de ácidos y bases Химическая стойкость к высоким и низким концентрациям кислот и щелочей	UNI EN ISO 10545/13 ASTM C-650	A - LA - HA UNAFFECTED
 RESISTENZA ALLE MACCHIE Stain resistance - Résistance aux taches - Fleckenbeständigkeit Resistencia a las manchas - Стойкость к образованию пятен	UNI EN ISO 10545/14	5
 COEFFICIENTE DI ATTRITO Slip resistance Coefficient de glissement Rutschfestigkeit Barfußbereich Coeficiente de atrito medio Коэффициент трения		NAT. LAPP. BOCCIARD.
	DIN 51130 DGUV Regel 108-003	R10 - R11
	DIN 51097 DGUV Information 207-006	B (A+B) - B (A+B)
	ANSI A326.3:2017 DCOF	WET ≥ 0,50 - WET ≥ 0,65
	B.C.R.A. D.M. N. 236 14/6/89	≥ 0,40 - ≥ 0,40
	AS 4586-2013 Anexo A	P2 - P3
	BS 7976-2: 2002	< 36 - >36
	BSEN13036-4:2011	Moderate - Low Slip
	Pendulum testers	Slip potential - potential
	UNE 41901:2017 EX DB SUA (actual)	- - 3

Per maggiori chiarimenti sui dati tecnici e sulla garanzia consultare il catalogo generale in vigore. - For further information on technical specifications, please consult our up-dated general catalogue. - Pour toutes informations supplémentaires sur les données techniques et sur les garanties, veuillez consulter le catalogue général en vigueur. - Für weitere Informationen über technische Daten und Garantiebeziehungen siehe bitte auf den aktuellen Gesamtkatalog. - Para ulteriores informaciones sobre los datos técnicos y la garantía, vease el catalogo general en vigor. - Более подробную информацию о технических данных и гарантии смотрите в действующем сводном катал.



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL.COM/GG UL 2818






放射性水平A类







IMBALLI E PESI

Packing and Weight | Emballages et Poids | Verpackung und Gewicht | Embalajes y Pesos | Упаковка и Вес

Formato Size Format Format Тamaño Формат cm	Spessore Thickness Epaisseur Stärke Espesor Толщина mm	Pz. x Mq. Pieces x Sqm Pcs / M ² Stk. x Qm Pzs x Mc. Шт x Кв.М.	Pz. x Scat. Pieces x Box Pcs / Bte Stk. x Krt. Pzs x Caja Шт x Кор.	Mq. x Scat. Sqm x Box M ² / Bte Qm x Krt. Mc. x Caja Кв.М. x Кор.	Peso x Scat. Weight x Box Poids / Bte Gewicht x Krt. Peso x Caja Вес x Кор. Kg	Scat. x Pal. Boxes x Pal. Bte / Pal. Krt. x Pal. Cajas x Pal. Кор. x Подд.	Mq. x Pal. Sqm x Pal. M ² / Pal. Qm x Pal. Mc. x Pal. Кв.М x Подд.	Peso x Pal. Weight x Pal. Poids / Pal. Gewicht x Pal. Peso x Pal. Вес x Подд. Kg
45x90 Naturale - Lappato	9,5	2,47	3	1,22	26,73	32	39,04	855
30x60 Nat. - Lapp. - Bocciardato	9,5	5,56	6	1,08	23,76	48	51,84	1140
30x30 Mosaico Square	9,5	11,11	5	0,45	8,73	60	27,00	524



Ergon is a brand of Emilceramica S.r.l. a socio unico	Sede Commerciale/ Amministrativa
emilgroup.it/ergon emilgroup.it	Via Ghiarola Nuova, 29 - 41042 Fiorano Modenese (MO) Italy T +39 0536 835111 - info@emilceramicagroup.it